


## TECHNICKÝ LIST

### PLETENÉ EPDM HADICE

SKUPINA	PREIMER (V MM)		MAX	MAX	MATICA
	VNÚTORNÝ	VONKAJŠÍ	TLAK	TEPLOTA	TYP
121XXX-YY	7,5 mm	11 mm	9 Bar	90° Celsius	3/8"F x 3/8"F
122XXX-YY	7,5 mm	11 mm	9 Bar	90° Celsius	1/2"F x 1/2"F
123XXX-YY	7,5 mm	11 mm	9 Bar	90° Celsius	1/2"F x 3/8"F
124XXX-YY	10 mm	13,5 mm	9 Bar	90° Celsius	1/2"M(krátka) x 1/2"F
125XXXYY-YY	10 mm	13,5 mm	9 Bar	90° Celsius	1/2"M(dlhá) x 1/2"F
126XXX-YY	7,5 mm	11 mm	9 Bar	90° Celsius	3/8"M x 3/8"M
127XXXKX-YY	7,5 mm	11 mm	9 Bar	90° Celsius	M 8x1 (krátka) - 3/8"F
127XXXDX-YY	7,5 mm	11 mm	9 Bar	90° Celsius	M 8x1 (dlhá) - 3/8"F
128XXXKX-YY	7,5 mm	11 mm	9 Bar	90° Celsius	M 10x1 (krátka) - 3/8"F
128XXXDX-YY	7,5 mm	11 mm	9 Bar	90° Celsius	M 10x1 (dlhá) - 3/8"F

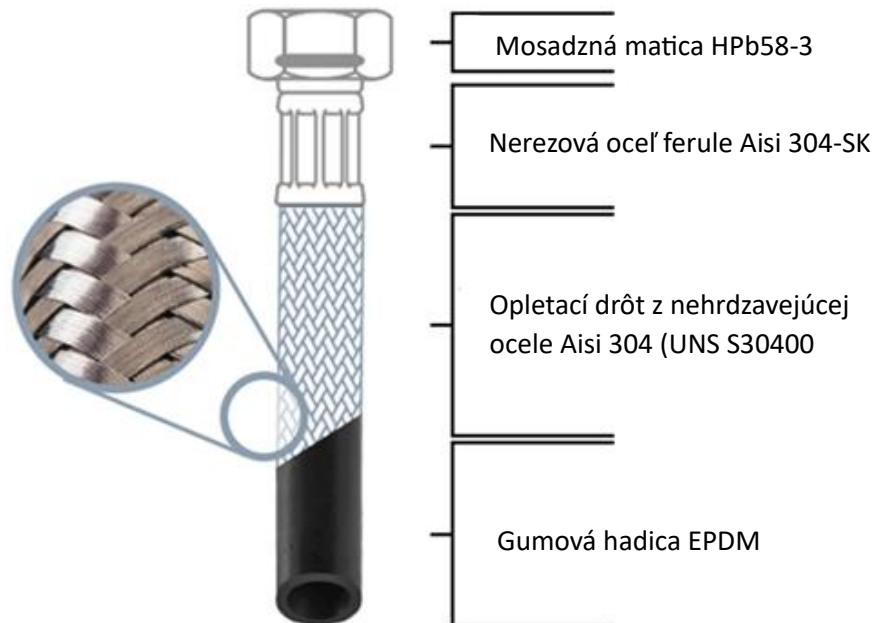

Naše pletené hadice sú vyrábané podľa európskych noriem EN 13618.

Škrlevo, 06.03.2024

Ivor Tucić, CEO